


TECHNICAL SPECIFICATIONS

ACOUSTIC SCREEN Damier BOTH SIDES ON THE DESKTOP

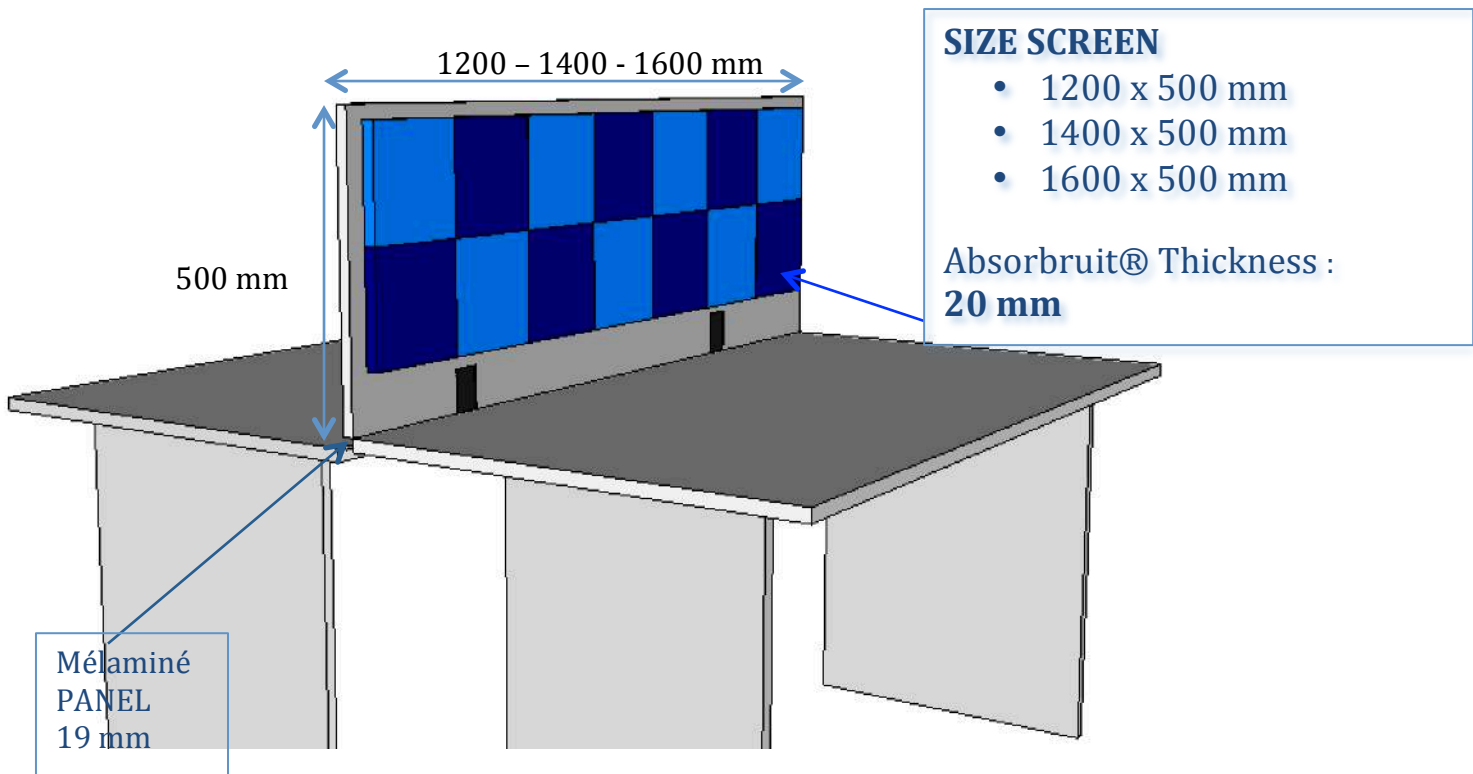

Description Screen:

Acoustic screen on the desktop Damier is an insulated partition and sound absorption. She is ready to land on the desk with clamps to separate two offices.

Composition :

Acoustic partition on the office Damier is composed of a 19mm thick panel of melamine and Absorbruits® panels 20 and 40 mm thicknesses of flexible convoluted foam with exceptional quality absorption noise glued surface 2 sides .




Panel wood Mé laminé



Panel Absorbruit® foam
Replaceable if damaged or needs

Courbe Acoustic Absorption

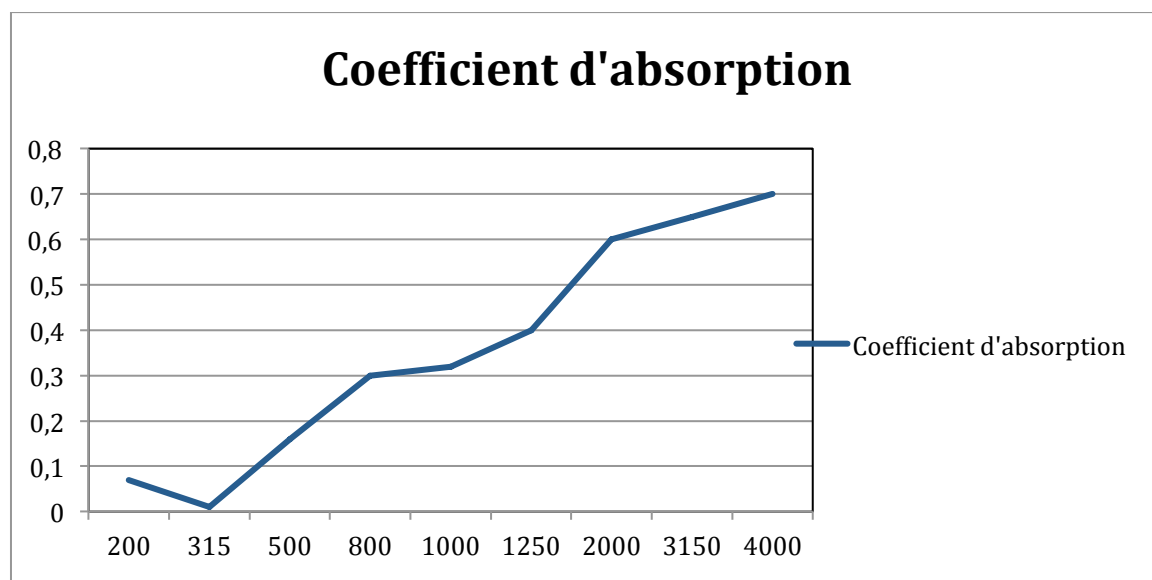

Frequency (Hz)	Absorption Coefficient	Absorption Coefficient Thickness 20 mm
200	0,07	0,06
315	0,10	
500	0,16	Médiums 0,39
800	0,30	
1000	0,32	
1250	0,40	
2000	0,60	Aigues 0,65
3150	0,65	
4000	0,70	

Attachment system

The fixation system proposed allows to pinch the table and the wall easily.
 The attachment clip is self-fixing.

Epaisseur métal 3 mm

