


## TECHNICAL SPECIFICATIONS

### ACOUSTIC SCREEN Olympic 3D BOTH SIDES ON THE DESKTOP

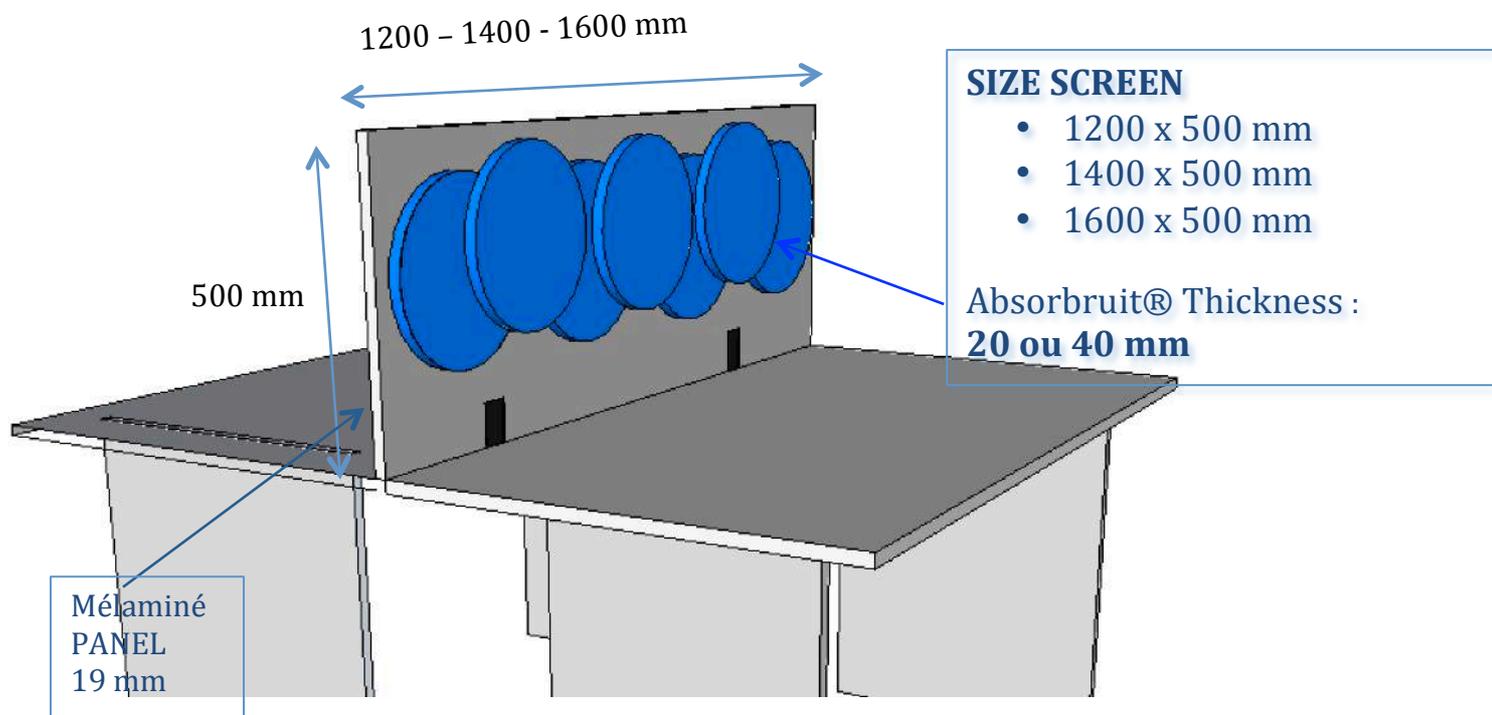

#### Description Screen:


Acoustic screen on the desktop Olympic 3D is an insulated partition and sound absorption. She is ready to land on the desk with clamps to separate two offices.

#### Composition :

Acoustic partition on the office Olympic 3D is composed of a 19mm thick panel of melamine and Absorbruits® panels 20 and 40 mm thicknesses of flexible convoluted foam with exceptional quality absorption noise glued sides .




Panel wood Mélangé

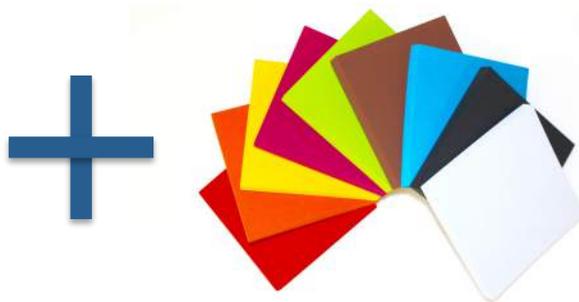

Panel Absorbruit® foam  
Replaceable if damaged or needs

## Curve Acoustic Absorption

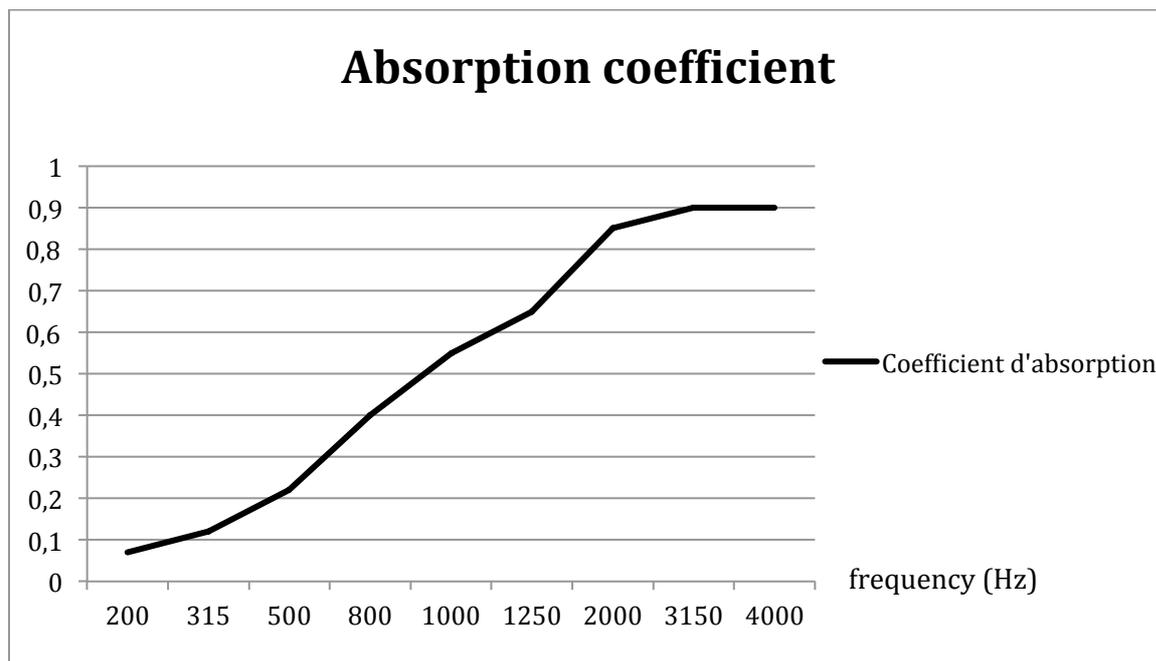

Frequency (Hz)	Absorption Coefficient	Absorption Coefficient for 40 mm thickness
200	0,36	<b>Low</b> <b>0,06</b>
315	0,66	
500	0,22	<b>Medium</b> <b>0,61</b>
800	0,40	
1000	0,55	
1250	0,65	
2000	0,85	<b>High</b> <b>0,88</b>
3150	0,90	
4000	0,90	

## Attachment system

The fixation system proposed allows to pinch the table and the wall easily.  
The attachment clip is self-fixing.

Epaisseur métal 3 mm

